

Ultrasonic Flaw Detector

SONOSCREEN® ST10

Perfect for Weld Seam Testing


MADE IN GERMANY



Nondestructive Testing

SONOSCREEN® ST10

User-friendly and Extremely Reliable

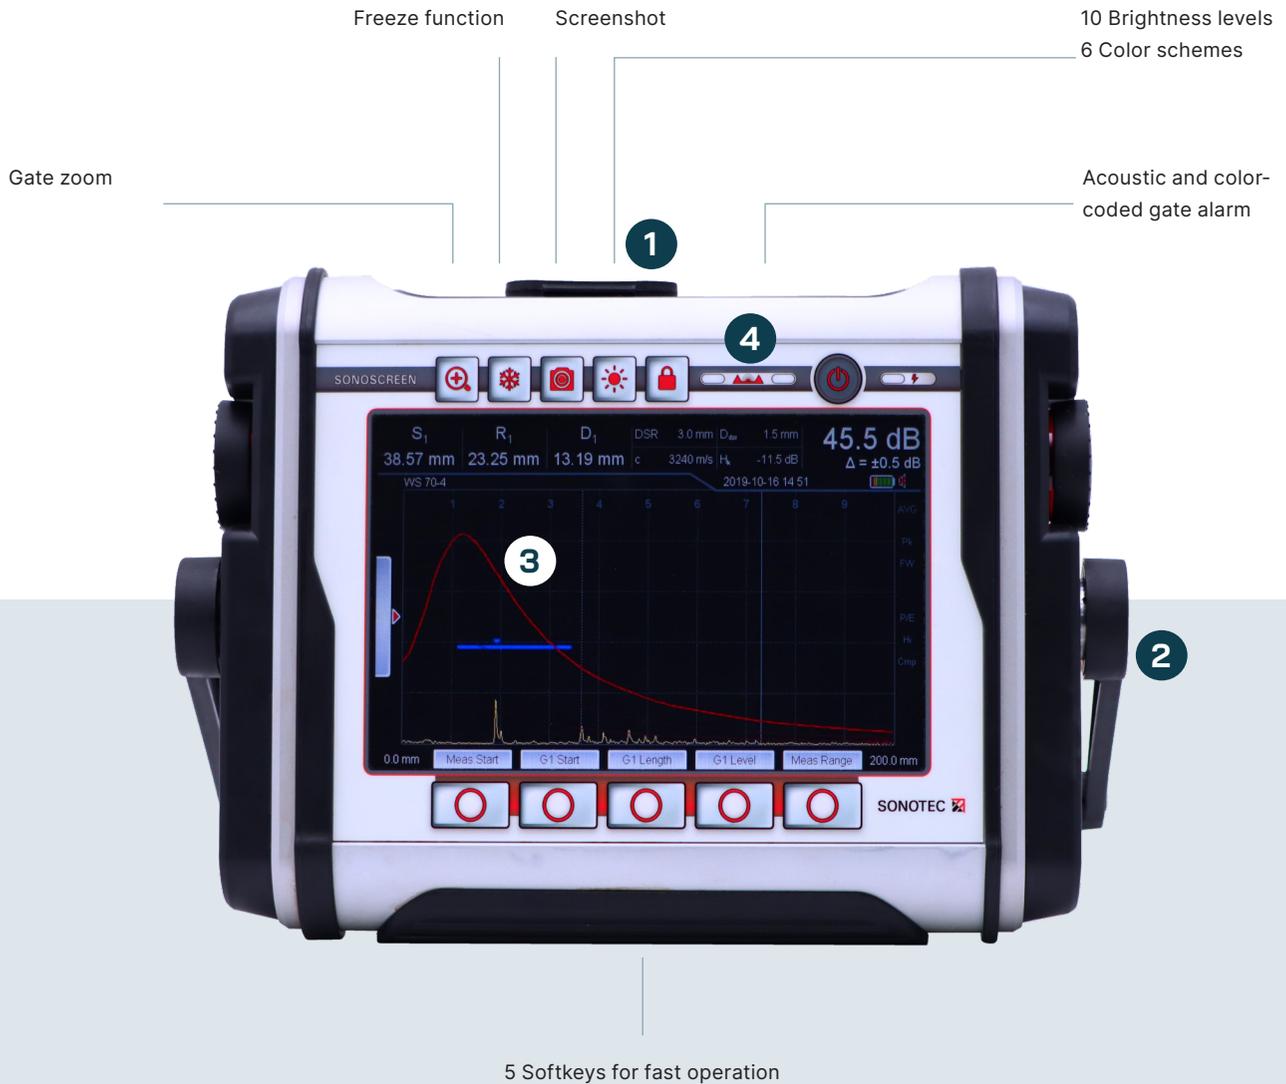

Interfaces

USB, Probe connections, voltage supply, digital or analog output (optional)



Stand

Stable, multi-angle fold-out stand – also serves as carry handle



Functional Design

Rotary knob & 4 buttons for quick access to all functions, right and left hand operation possible



Gate Alarm

Acoustically, color-coded:
Gate 1: blue
Gate 2: green

Applications and Industries

Flaw Detection in Demanding Environments



Weld Seam Testing
e. g. oil and gas industry



Inspection of Forgings
e. g. railway engineering



Testing of Castings
e. g. engine construction




Testing of Plastics and Composites
e. g. lightweight construction


Developed with the help of experienced material testing experts, the compact ultrasonic flaw detector unites highspec performance with user-orientation. A clearly-structured menu quickly guides the tester through all of the steps required for test set-up. Efficiency is also boosted by the full-text menu labels and by the complete overview of all probe settings.

This makes the SONOSCREEN ST10 an ideal tool for all standard ultrasound inspections, from weld seam testing, wall thickness measurement and sheet metal testing to the detection of invisible cracks, inclusions, cavities and discontinuities in metals, plastics, ceramics and composite materials.

Evaluation Methods

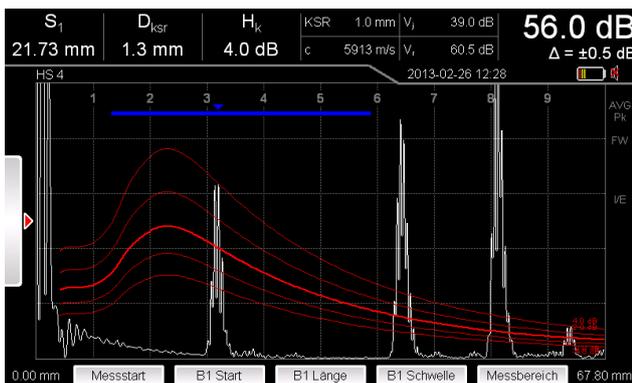

DGS Evaluation

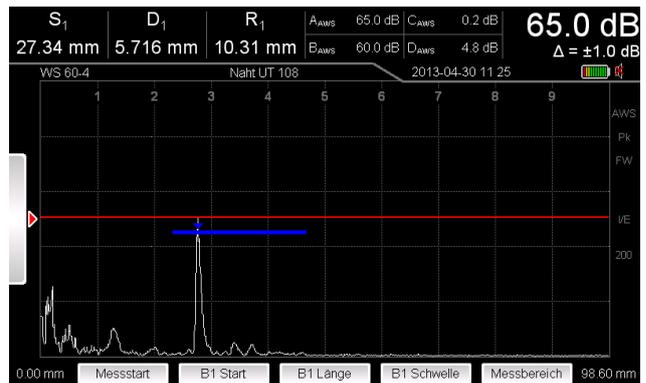

AWS Evaluation

- DGS-curves for single-element probes and transmitter/receiver probes
- DAC-evaluation with TCG
- Single point modification of DAC curve

- For AVG and DAC up to 4 additional, freely movable curves can be displayed (in 0.5 dB steps)
- Amplitude evaluation according to AWS D1.1
- Comparison signal and envelope curve to support the signal evaluation

Intuitive Operation Fast Test Preparation

The SONOSCREEN ST10 offers a clearly structured menu system optimized to support the testing process plus intuitive device operation. This helps to increase testing reliability and to save valuable testing time.

The ultrasonic flaw detector guides you step-by-step through the pre-test set-up. All parameters needing configuration are arranged logically one after the other. This ensures that all relevant parameters are set before testing begins.

Useful database also helps to shorten the preparation time: the database already contains all SONOSCAN probes. Other probes are easy to add. The provided probe settings overview enables quick verification of the entered data. Device setup, probe and material databases can be stored on a USB flash drive and transferred to other SONOSCREEN units.



For fast, manual distance adjustment, the calibration bodies K1 and K2 are already stored.

Advantages

- Large, high-resolution 8" graphic display (174 mm × 104 mm), optimal readability even in direct sunlight
- Robust Aluminum housing, IP66
- Clearly-structured menu and intuitive usability
- Configurable display with up to 10 measurement values
- Display of a measurement range up to 10m in one A-scan
- 400V powerful square wave transmitter
- Editable database for materials, probes, setups
- 5ns resolution over the entire measurement range (equivalent to 0.03mm in 10m steel)
- 2 GB internal memory for storing up to 60 000 A-scans, plus device configuration
- External data storage and transfer via USB flash drive



Complete set


- Charger and couplant
- USB stick
- Transport and storage case
- Protective and carrying bag
- Calibration certificate
- Manual



Software options

- AVG and DAC evaluation
- TCG function
- AWS evaluation

Complete documentation

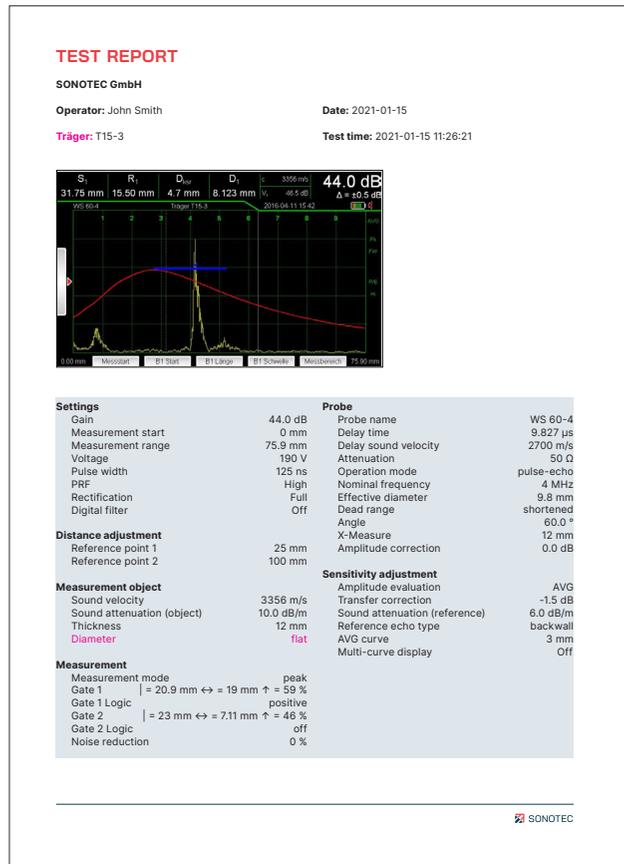

SONOSCAN Ultrasonic probes

We offer a wide range of SONOSCAN standard single-element, dual-element and angle beam probes. SONOTEC is also specialized in customized ultrasonic probes - please send us your requirements!

Find our complete ultrasonic probe portfolio on our website!



Ultrasonic angle beam probes (WS 45-4)

Standard probes (selection)

Type	Angle	Frequency	Element size	Connection
WS (small)	45° 60° 70°	4 MHz	8 mm × 9 mm	LEMO 00
WS (small)	45° 60° 70°	2 MHz	8 mm × 9 mm	LEMO 00
WM (medium)	45° 60° 70°	2 MHz	14 mm × 14 mm	LEMO 00
WL (large)	45° 60° 70°	2 MHz	20 mm × 22 mm	LEMO 00
TS4	Dual-element	4 MHz	Ø 17 mm	2x LEMO 00
TXS7.5	Fingertip	7,5 MHz	Ø 5 mm / 2	2x LEMO 00
PL1	Single element	1 MHz	Ø 24 mm	LEMO 1S
PL2	Single-element	2 MHz	Ø 24 mm	LEMO 1S

Technical Data

General Data	
Standards	DIN EN 12668-1, ASTM E1324
Ambient Temperature	-20°C ... +60°C
Display	8" color display in 16:9 format; WVGA 800px × 480px (174mm × 104mm)
Operating Modes	Pulse-Echo, Transmit-Receive, Through-Transmission
Dimension (W x H x D)	310mm × 206mm × 77mm
Weight	3 000g
Housing	Aluminum
Protection Class	IP66
Battery	Internal Li-Ion battery Operating time: up to 13 hours
Internal Memory	2GB, for up to 60 000 A-scans incl. device setup
External Memory	USB Stick
Reporting	Software (optional) for the creation of test reports including screenshot screenshot including all parameters (A-scan, measurement context, date and time) setup with all devices and probe settings test protocol material database probe database
Transmitter	
Pulse Shape	Rectangular, unidirectional
Polarity	Negative
Pulse Width	Automatic, or 20ns ... 1 000ns, in steps of 5ns
Voltage	50V ... 400V, adjustable in steps of 10V
Pulse Frequency	Automatic or manual (low, medium, high, maximum)
Receiver	
Amplifier	Dynamic range: 0dB to 110dB Increment: 0; 0.5; 1; 2; 6; 12dB
Rectification	Full-wave; positive/negative half-wave; RF
Noise Reduction	0% ... 80% of screen height
Amplitude Measurement	0 to 125% of screen height
Filter	0.5 1 2 2.25 4 5 10 15 1 ... 5 5 ... 10 10 ... 15 1 ... 20 0.5 ... 20MHz
Adjustment	
Measurement Range	0.5mm ... 10 000mm (steel)
Distance Adjustment/ Probe Calibration	Automatic 2-point adjustment: calculation of sound velocity and probe delay by use of two adjustment echoes
Resolution	0.01mm in the measuring range up to 10 000mm (depending on sound velocity)
Sound Velocity	Adjustable from 500m/s ... 15 000m/s, in steps of 1m/s or fixed preset values
Measurement Range	10mm to 10 000mm (up to 20 000mm with pulse shift)
Evaluation	DGS*, DAC* (incl. TCG) or AWS D1.1*
Gate	2 independent gates color bars (gate 1: blue, gate 2: green) position and width adjustable over the full measurement range response threshold adjustable from 10% to 90% of screen height in steps of 1%
Connectors	2 probe connectors: LEMO 1S Switching output/Analog output*: LEMO 1S Power supply: LEMO 1S 2 USB connectors

Contact and Support

SONOTEC GmbH
Nauendorfer Str. 2
06112 Halle (Saale)
Germany

☎ +49 (0)345 / 133 17-0
✉ sonotec@sonotec.de
🌐 www.sonotec.eu
🏆 Certified according to ISO 9001

SONOTEC® is a registered trademark

Rev. 5